

tile specifications

style name	form tile
style number	5T136
construction	multi-level pattern cut / loop
fiber	eco solution q® nylon
dye method	100% solution dyed

u.s.

metric

	u.s.	metric
pattern repeat	none	
tufted weight	28.0	949.36 g/m ²
gauge	1/10	39.37 per 10 cm
stitches per inch	8.0	31.50 per 10 cm
finished pile thickness	0.149	3.78 mm
total thickness	0.299	7.59 mm
average density	6765	12.60 kilotex
product size	24" x 24"	60.96 cm x 60.96 cm
primary backing	synthetic	
secondary backing	ecoworx® tile	
protective treatments	ssp® shaw soil protection	


testing

radiant panel	Class I
nbs smoke	less than 450
electrostatic propensity	less than 3.5 kv

warranties

lifetime commercial limited

installation method

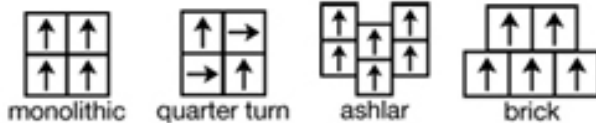

coordinating products

monolith woven, base metal woven, strata, fault, slab tile, honed tile, alchemy tile

environmental certification

nsf140 gold

cradle to cradle v3.1 silver certified



Specifications are subject to nominal manufacturing variances.
Material supply and/or manufacturing processes may necessitate changes without notice.

shawcontractgroup.com | 1 800.257.7429 | shawcontractgroup.cn | +86 400 800 7429 (Asia Pacific)

eco impacts

end of life

environmental guarantee

free pick up & recycling

To recycle call 800.509.Shaw or +86 400 800 Shaw (Asia Pacific)

materials

ingredients

face fiber	nylon 6
dye method	100% solution dyed
backing	polyolefin composite
surface treatments	non c8 fluorocarbon chemistry
does not contain PVC, phthalates, or PBD/PBDE	

recycled content

total recycled content (by weight)	41.0 %
pre-consumer	41.0 %
post-consumer	0.0 %
bio-based/rapidly renewable content (by weight)	0.0 %
packaging	100% recyclable
country of origin (manufacturer)	USA

Meets or exceeds all local and national regulations in country of manufacture.
 Manufactured in an ISO9001 & ISO14001 certified facility or equivalent.
 Recycled content is calculated using system allocation, mass balance, and direct insertion.
 The actual recycled content in this product will likely vary. For more information email
info@shawgreenedge.com.

third party certifications

Cradle to Cradle Certified	V3.1 silver
NSF 140	gold certified
CRI green label plus	certified glp9968
USGBC LEED	contributes